

Sweep modes, RBW, and Span settings for the SSA3000X

October 25, 2017

The SIGLENT SSA3000X series of spectrum analyzers has three distinct sweep modes available, they are auto, sweep and FFT.

By default, auto is selected. It selects the best mode based on RBW, Span, and Tracking Generator settings.

Sweep mode configures the spectrum analyzer to work as a traditional swept superheterodyne design. Breaking the sweep span into discrete steps with the frequency width of each step determined by the RBW setting. This technique allows for the use of the tracking generator (TG), but slows the sweep rate slightly.


FFT mode provides faster scanning rates, but the maximum RBW selection is smaller the tracking generator (TG) **cannot** be used.

RBW	Max Span (Sweep Mode)	Max Span (FFT Mode)*
10 Hz	N/A	30 MHz
30 Hz	300 kHz	100 MHz
100 Hz	3 MHz	300 MHz
300 Hz	30 MHz	700 MHz
1 kHz	300 MHz	3.2 GHz
3 kHz	3.2 GHz	"
10 kHz	"	"
30 kHz	"	N/A
100 kHz	"	N/A
300 kHz	"	N/A
1 MHz	"	N/A

*The tracking generator (TG) cannot be activated while in FFT mode.

The Sweep Mode can be changed by pressing sweep on the front panel and selecting the sweep mode from the sweep mode list.

FFT mode is indicated on the left-hand-side of the display, as shown below.

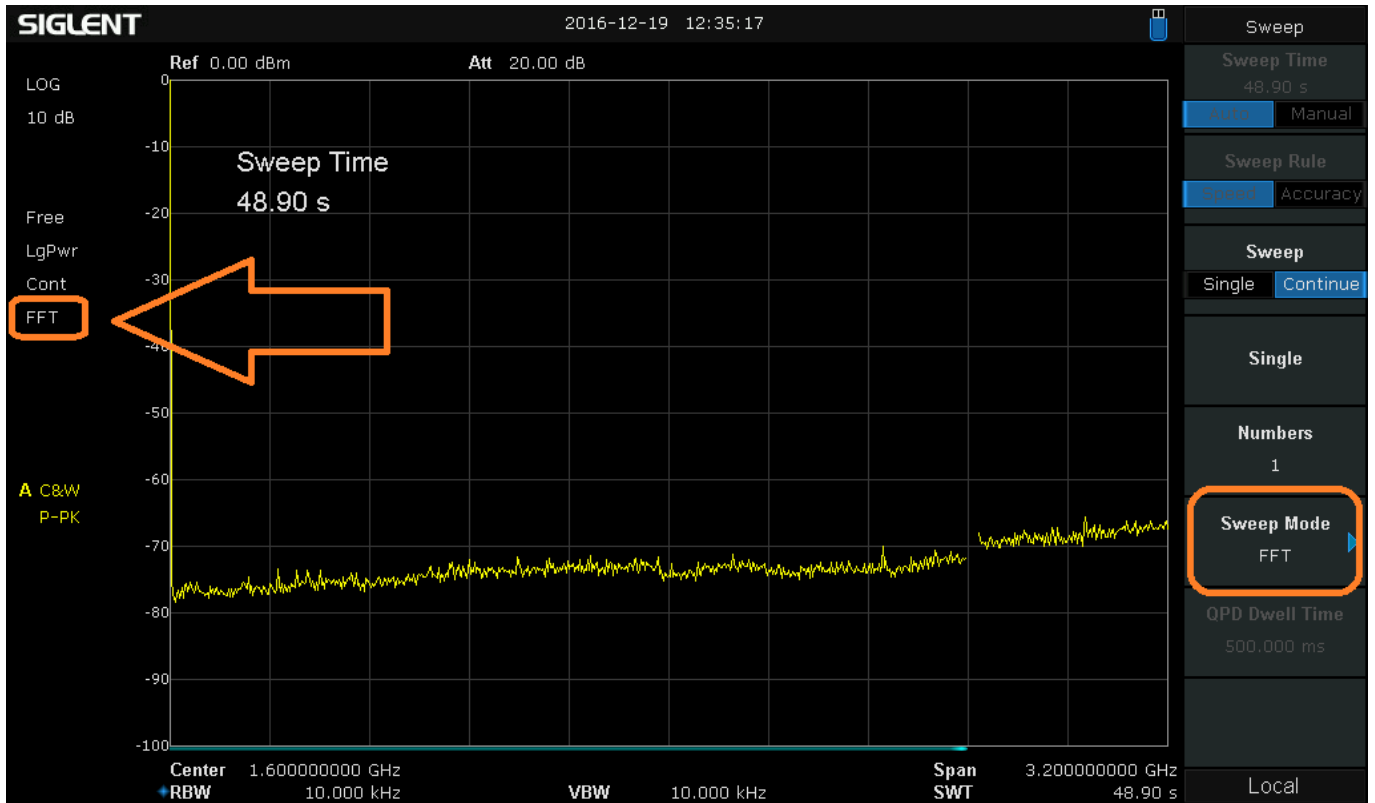

If the instrument displays a “sweep time error” or “RBW error”, check the sweep mode, RBW, and span settings. You may need to select another sweep mode and perform the scan again.



North American Headquarters

SIGLENT Technologies NA
6557 Cochran Rd Solon, Ohio 44139
Tel: 440-398-5800
Toll Free: 877-515-5551
Fax: 440-399-1211
info@siglent.com
www.siglentamerica.com/

European Sales Offices

SIGLENT TECHNOLOGIES GERMANY GmbH
Staetzlinger Str. 70
86165 Augsburg, Germany
Tel: +49(0)-821-666 0 111 0
Fax: +49(0)-821-666 0 111 22
info-eu@siglent.com
www.siglenteu.com

Asian Headquarters

SIGLENT TECHNOLOGIES CO., LTD.
Blog No.4 & No.5, Antongda Industrial Zone,
3rd Liuxian Road, Bao'an District,
Shenzhen, 518101, China.
Tel: + 86 755 3661 5186
Fax: + 86 755 3359 1582
sales@siglent.com
www.siglent.com/ens