

Programming Example: Open Socket LAN connection using Python

October 20, 2017

Automating a test can dramatically increase the productivity, throughput, and accuracy of a process. Automating a setup involves connecting a computer to the test instrumentation using a standard communications bus like USB or LAN and then utilizing code entered via a software layer (like LabVIEW, .NET, Python, etc..) to sequence the specific instrument commands and process data.

In this note, we are going to show how to use Python to create a communications link between an instrument and a remote computer using a LAN connection. Once the connection is verified, you can begin to work on the control software.

NOTE: This example requires open sockets on the instrumentation. At this time, not all SIGLENT products feature open sockets. Check the product page FAQs or with your local SIGLENT support office for more information.

Python is an interpreted programming language that lets you work quickly and is very portable. Python has a low-level networking module that provides access to the socket interface. Python scripts can be written for sockets to do a variety of test and measurements tasks.

Here is a Python 2.7 script that opens a socket, sends a query and closes the socket. It performs this operation in a loop 10 times:

[PythonSocket_052018](#)

You can follow the instructions below to build your own example:

1. Power on and connect the instrument to the network via LAN
2. Verify that the Gateway, Subnet Mask, and IP address of the instrument are valid for the network you wish to use. This information is typically located in the System Information or IO menu. See the specific instrument user's guide for more information on LAN settings.
3. Download python and your favorite python editor (I use IDLE):


<https://www.python.org/>

<https://docs.python.org/2/library/idle.html>

Start your python editor:



5. Open a new file by pressing File > New File.. and name the file

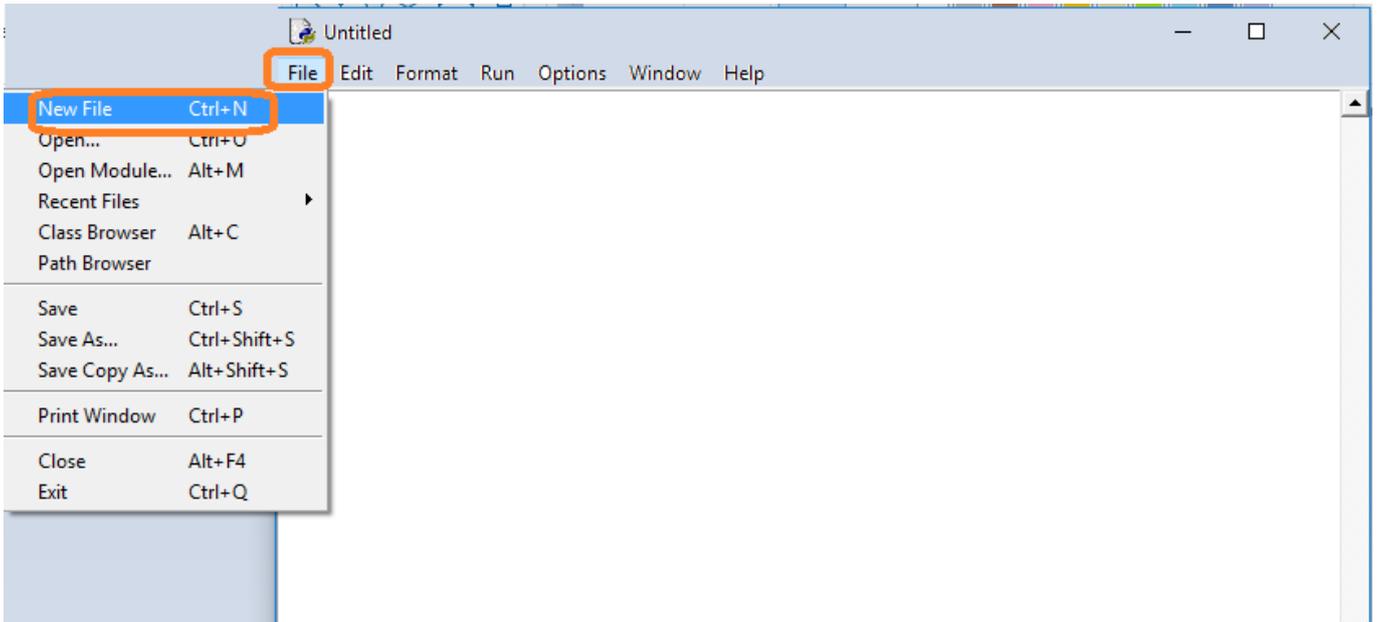

6. Copy and paste the code at the end of this note into the file editing window:

```
PythonSocket.py - C:\Users\jayre\Documents\Application Notes\Python\PythonSocket.py (2...
File Edit Format Run Options Window Help
#!/usr/bin/env python
#-*- coding:utf-8 -*-
#-----
# The short script is a example that open a socket, sends a query,
# print the return message and closes the socket.
#-----
import socket # for sockets
import sys # for exit
import time # for sleep
#-----
remote_ip = "192.168.0.17" # should match the instrument's IP address
port = 5024 # the port number of the instrument service
count = 0

def SocketConnect():
    try:
        #create an AF_INET, STREAM socket (TCP)
```

7. Change the IP address and port number so that they match the IP address and port for the instrument you wish to connect to:

```
PythonSocket.py - C:\Users\jayre\Documents\Application Notes\Python\PythonSocket.py (2...
File Edit Format Run Options Window Help
#!/usr/bin/env python
#-*- coding:utf-8 -*-
#-----
# The short script is a example that open a socket, sends a query,
# print the return message and closes the socket.
#-----
import socket # for sockets
import sys # for exit
import time # for sleep
#-----
remote_ip = "192.168.0.17" # should match the instrument's IP address
port = 5024 # the port number of the instrument service
count = 0

def SocketConnect():
    try:
        #create an AF_INET, STREAM socket (TCP)
```

Save the file:

The screenshot shows the PythonSocket.py editor with the File menu open. The 'File' menu item is highlighted with an orange box. The 'Save' option is also highlighted with an orange box. The code in the background is the same as in the previous screenshot.

8. To Run, select Run and Run Module:

The screenshot shows the PythonSocket.py editor with the Run menu open. The 'Run' menu item is highlighted with an orange box. The 'Run Module' option is also highlighted with an orange box. The code in the background is the same as in the previous screenshots.

```
*Python 2.7.12 Shell*
File Edit Shell Debug Options Window Help
Python 2.7.12 (v2.7.12:d33e0cf91556, Jun 27 2016, 15:19:22) [MSC v.1500 32 bit (Intel)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
= RESTART: C:\Users\jayre\Documents\Application Notes\Python\PythonSocket.py =
Welcome to the SCPI instrument 'Siglent SDM3055'
>>
0:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
1:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
2:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
3:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
4:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
5:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
6:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
7:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
8:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
9:: Siglent Technologies,SDM3055,SDM30CA1160534,1.01.01.18R1
>>
```



North American Headquarters

SIGLENT Technologies NA
6557 Cochran Rd Solon, Ohio 44139
Tel: 440-398-5800
Toll Free: 877-515-5551
Fax: 440-399-1211
info@siglent.com
www.siglentamerica.com/

European Sales Offices

SIGLENT TECHNOLOGIES GERMANY GmbH
Staetzlinger Str. 70
86165 Augsburg, Germany
Tel: +49(0)-821-666 0 111 0
Fax: +49(0)-821-666 0 111 22
info-eu@siglent.com
www.siglenteu.com

Asian Headquarters

SIGLENT TECHNOLOGIES CO., LTD.
Blog No.4 & No.5, Antongda Industrial Zone,
3rd Liuxian Road, Bao'an District,
Shenzhen, 518101, China.
Tel: + 86 755 3661 5186
Fax: + 86 755 3359 1582
sales@siglent.com
www.siglent.com/ens